

AUTOMATIC PACKAGING MACHINE FOR FIBER DISCS



MACHINE TYPE
Automatic

NOISE
79dB


DIMENSIONS
Width: 5500 mm
Depth: 2000 mm
Height: 2000 mm

WEIGHT
1500 Kg

DEGREE OF OF CONTROL PANEL
IP 55

OPERATION
Electromechanical

MAIN COMPONENTS

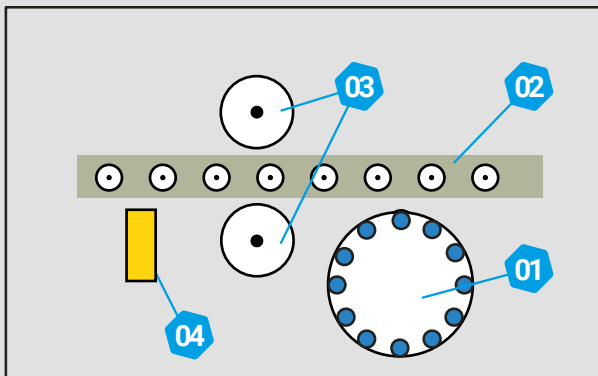

- 01** Loading table
- 02** Feeding system with rods
- 03** Shrinking tape coils
- 04** Thermoretraction device

PRODUCTION PERFORMANCES

∅ discs	115 ÷ 180 mm
Package max height	170 mm
Packs/min	6
Max discs per pack	10
The number of discs per package varies depending on the thickness of the discs	

ELECTRIC PLANT CHARACTERISTICS

Supply voltage	400 V ac
Frequency	50 Hz
System	Three-phase + earth + neutral
Auxiliary voltage	24 V dc
Absorbed power	10 kW

PNEUMATIC PLANT CHARACTERISTICS

Maximum required pressure	10 bar (1.0 Mpa)
Operating pressure	6 bar (0.6 Mpa)
Average air consumption	200 litres/min